

## **EXHIBIT B**



- Menu
- Search
- Account

888.503.1317 CHAT LIVE WITH AN LED EXPERT ABOUT US SUPPORT CUSTOM OEM SOLUTIONS MY ACCOUNT






Cart

Flexible / Strip Lights ▾ Recessed In-Ceiling Lights ▾ Flood Lights ▾ Commercial ▾ Residential ▾ Exterior ▾ Underwater Lights ▾ Power Supplies & Controls ▾

Home > B-Series (Bendable) Zig-Zag Flexible LED Strip Light - Standard Bright (18 LEDs/foot)

## B-Series (Bendable) Zig-Zag Flexible LED Strip Light - Standard Bright (18 LEDs/foot)

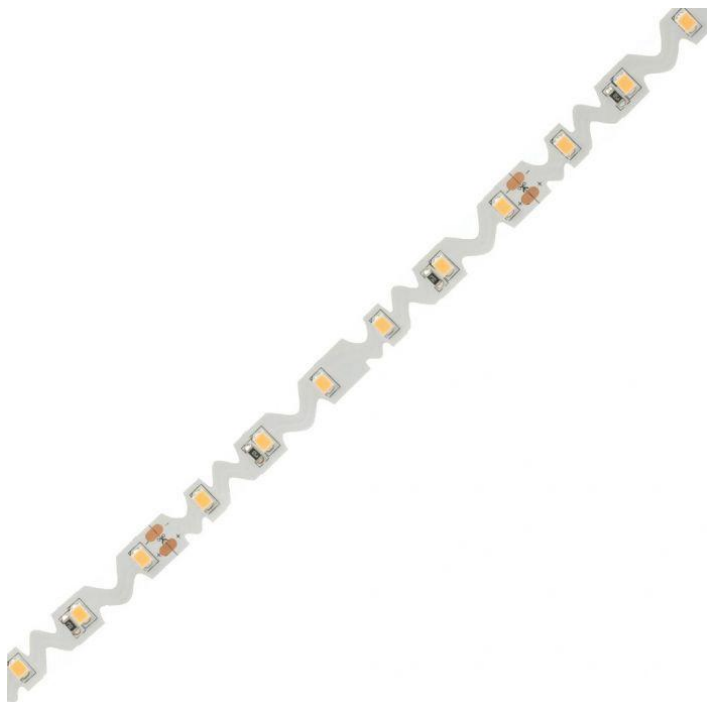

In Stock (usually ships same or next business day)

SKU AL-SL-B-S

**\$42.99** per reel (each reel is 16.4')

LED LIGHT COLOR

[CLICK FOR HELP CHOOSING](#)



WATERPROOFING

[CLICK FOR HELP CHOOSING](#)

NON-WATERPROOF

Comes with 3M adhesive tape backing

Mounts with mounting strips

VOLTAGE

[CLICK FOR HELP CHOOSING](#)

12VDC

Requires a power supply

Qty

1



Add to Cart

Share:

[Details](#)

PRODUCT DETAILS

TECHNICAL DOCS & VIDEOS

FAQ

ACCESSORIES

POWER SUPPLY CALCULATOR

WHY ASPECTLED?

aspectLED's Flexible LED strip lights are a perfect solution for a wide variety of architectural and accent lighting applications including; cove lighting, under-cabinet lighting, back-lighting, pathway lighting and decorative lighting. Our Standard Bright B-Series (bendable) flexible LED strip lights are made with wire leads on both ends of each 16.4' reel and can be cut every 2", allowing you to cut pieces to the exact length that you need.

B-Series Zig-Zag LED strip lights are a unique product that allows much sharper horizontal turns than traditional LED strip lights, allowing creations that wouldn't otherwise be possible. Please note: B-Series flexible strip light is not compatible with aspectLED's strip light connectors.



## Physical Dimensions & Specifications

NON-WATERPROOF	
Part #	AL-SL-BN-S
Dimensions	5/16" (8mm) wide 1/16" (2mm) thick 16.4' (5M) long
Distance Between LEDs	9/16" (14mm)
Cut Length	2"
IP Rating	IP20 Indoor Use Dry Location
Adhesive Backing	Yes / 3M Adhesive
Mounting Method	Adhesive Backing
Input Voltage	12VDC
Beam Angle	120 Degrees
Dimmable	Yes
Power Consumption	2.2 Watts per foot (7.2 Watts per meter)
Luminous Flux	360 Lumens per foot
LED Type	SMD 2835 LED Chips
LED Color	Warm White: 3000K Neutral White: 4000K DayWhite: 6000K
LED Quantity	18 LEDs per foot (300 per reel)
Max Run	16.4 feet
Weight	0.4 lbs per reel
Average Lifespan	50,000 hours
Warranty	1 Year
Suitable Uses	Dry Location Only
Standards / Certifications	RoHS, UL Listed

### Features:

- Maintenance free
- Solid-state construction makes for high shock and vibration resistance
- SMD 2835 LEDs are super bright, high intensity and low power consumption
- Extremely long life: up to 50,000 hours with very low time-luminosity decay
- No RF interference
- Custom flexible PCB board color are available in white, black (special order) or yellow (special order)

### Applications:

- Architectural lighting for canopies, corridors, archways, windows
- Downlighting or uplighting for wall wash applications
- Backlighting or edgelighting for signage
- Edge-lighting for glass
- Under-cabinet, toe-kick, in-cove moldings
- DIY projects
- Safety stairtread and step marking
- Decorative lighting for holidays, tradeshow, exhibitions
- Under counter lighting

Reviews

SIGN UP FOR EMAILS

We won't share, sell or trade your e-mail

SUBMIT

CONNECT

RESOURCE CENTER

- [LED Strip Light Setup](#)
- [Guide to Recessed Lights](#)
- [Converting CFL T8s to LED](#)
- [Installation Guides](#)
- [Applications](#)
- [LED Glossary](#)

CUSTOMER SERVICE

- [Contact Us](#)
- [Shipping & Delivery](#)
- [FAQ](#)
- [Returns & Exchanges](#)
- [Warranty](#)

COMPANY INFO

- [About aspectLED](#)
- [We're Hiring](#)

BUSINESS SERVICES

- [OEMs/Custom Product Manufacturing](#)
- [Distributor Accounts](#)
- [Product Customizations](#)
- [Lighting Design](#)

NEWSROOM

- [aspectLED Overview](#)
- [Images & Assets](#)
- [Media Contacts](#)

Copyright (c) 2020 ASP Holdings, Inc. All rights reserved.  
Minneapolis, Minnesota USA

[Terms Of Sale / Service](#) | [Privacy Policy](#)



PAYMENT METHODS WE ACCEPT

